

VFX Keyboard

Recalibration Malfunction

Repair Procedure



Note: Follow the instructions contained within this document at your own risk!

THANKS TO THE FOLLOWING INDIVIDUALS FOR THE DEVELOPMENT OF THIS DOCUMENT

PHOTOS AND TEXT – **HANS ARTMANN**
DOCUMENT INCORPORATION & CONVERSION TO MICROSOFT
WORD - **KYBDT**



Figure1

To open your VFX remove the 4 screws holding the cover and pull it open. Use an inbus key 2.5mm which you get in every hardware store for low money. Otherwise you'll damage the screws.

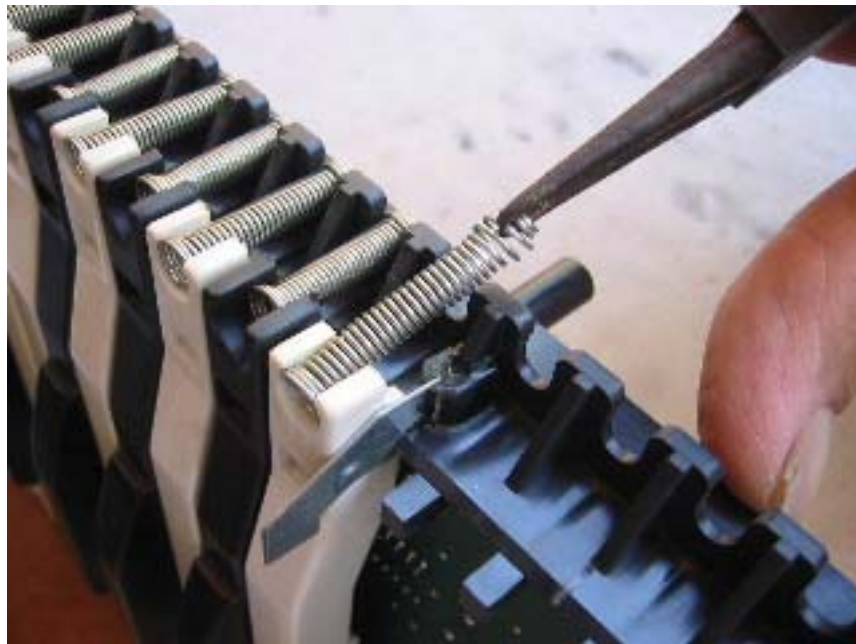


Figure2

Remove the springs.



Figure3

Unhook the keys with a screwdriver, move the grip away from you while lifting the key with the other hand.



Figure4

Always remove a black and a white key together.

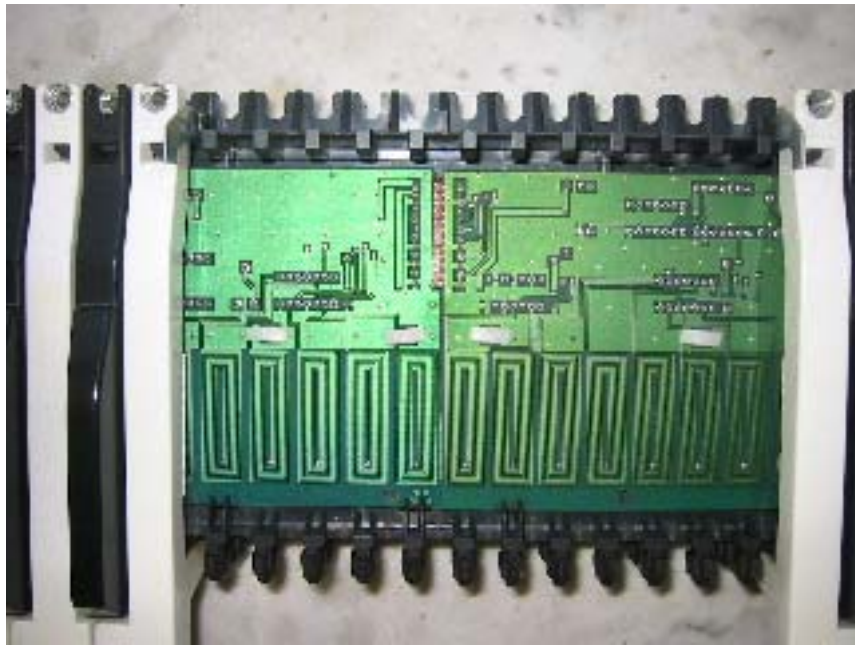


Figure5

When you turn the keyboard upside down you will see the buggy connector in the middle octave

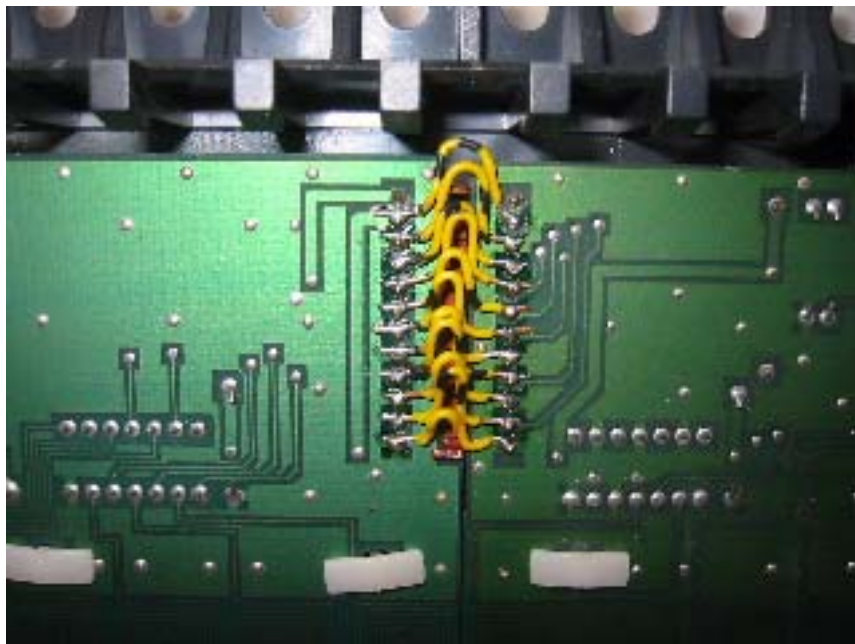


Figure6

Solder in 12 wire connections. There is no need to remove the connectors so you need not to disassemble the whole keyboard!